SUNTEK
Advanced Materials

Room 1601,1608, Tower A, Zensun Int'l Plaza, Zhengzhou 450009, China
Tel: +86 371 65331060
sales@suntekmaterial.com
www.suntekmaterial.com

Diamond blade without steel core

SUNTEK blade is only compound by abrasive layer. With thin thickness and high stable, this blade is used for high presion and slight deepth grooving and cutting.



Resin Bond Cutting Blade


Good self-sharpen and cut sharply. Elastic bond can improve surface quality

Metal Bond Cutting Blade


Good wear resistance, working life and shape maintenance.



1A8

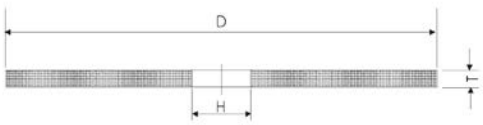

1A8/2

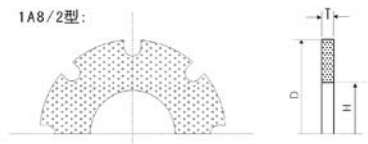

1A8/2 blade has water slot on edge, good for coolent

T \ D	25~60	70~78	80~110	110~125	127~200	Thick Tolerance
0.05~0.1	■					±0.002
0.1~0.15	■	■	■			
0.2~0.3	■	■	■	■		±0.003
0.4~2.0	■	■	■	■	■	
H	6、9、10、12.7、25.4、31.75、40、41.275、50.8、76.2、88.9、114.3					
Note	Other specification can be produced according to customer's requirement					

The information contained in this product Information document is the sole property of Henan Suntek International Co., Ltd, (Suntek Material) and cannot be distributed outside Suntek Material or its Customers, entirely or by parts, without the prior consent of Suntek Material. The typical characteristics do not constitute a precise Customer Specifications, which has to be elaborated separately between the Customer and Suntek Material in the frame of a commercial offer. Only with this precise Customer Specification can Suntek Material be bound to any commitment or liability the quality of its products.